

Polk County

BID 2024-19 Concrete Slab at 110 Allie Bean Livingston, TX

Proposed:	Proposal Amount
TRN Construction & Renovation 536 Wimberly Dr LIVINGSTON, TEXAS 77351 936-329-2282 TIM WIMBERLY	\$35,506.00

JAMES RILEY INC P.O. BOX 1105 CORRIGAN, TEXAS 75939 936-398-4295 JAMES RILEY	\$31,449.00
--	-------------

J.M. DOMINY CONSTRUCTION 111 HUMMINGBIRD CIRCLE LIVINGSTON, TEXAS 77351 936-327-2096 JACOB DOMINY	\$15,000.00
---	-------------

- Approved by Commissioners
Court- May 14, 2024

A.I. BUILDERS 26717 WESTHEIMER PARKWAY STE 303 KATY, TEXAS 77494 866-270-2970 ASALAH ALI	\$49,700.00
--	-------------

<p>SUPERIOR HOME BUILDERS 860 RED LOVE ROAD LIVINGSTON, TEXAS 77351 936-328-9900 BRANDON HICKS</p>	<p>\$27,300.00</p>
---	---------------------------

<p>COX CONCRETE CONTRACTORS P.O. BOX 631447 NACOGDOCHES, TEXAS 75963 936-564-6500 BRENDA JONES</p>	<p>\$44,124.00</p>
---	---------------------------



BID SUBMITTAL FORM

MUST BE SIGNED AND SUBMITTED AS A BID COVER SHEET

BID#: 2024-19: CONCRETE SLAB PROJECT AT 110 ALLIE BEAN, LIVINGSTON, TEXAS 77351

POLK COUNTY IS REQUESTING COMPETITIVE BIDS PER THE ATTACHED SPECIFICATIONS.

NAME OF BIDDER: J.M. Domy Construction (Jacob Domy)
Address: 111 Hummingbird Circle, Livingston, TX 77351
Phone: 936-327-2016 Fax: _____

HEREBY SUBMITS THE FOLLOWING BID:

Labor \$ 6,800
Materials \$ 8,200
Permits \$ N/A
Other \$ N/A

TOTAL BID \$ 15,000

Estimated Start and Completion Dates: Completion within 2 weeks of Award

Did you visit the site: Yes

Payment Terms: Total due upon completion, Net 7

Warranty: 1 Year Structural Damage (does not include shrinkage crack)

COMMENTS:

"IN SUBMITTING THIS BID TO POLK COUNTY, THE UNDERSIGNED BIDDER HEREBY AGREES TO CONFORM TO ALL BID REQUIREMENTS AND SPECIFICATIONS SET OUT BY POLK COUNTY."

Authorized Signature of Bidder: _____


(Printed Name) Jacob Domy
(Title) Owner/Managing Member
(Date) 5-10-2024



BID SPECIFICATIONS

- Site Visit Required. Call 936-327-6808 to schedule.
- Concrete 42' X 65' = 2,730 SQFT
- 5" Slab normal weight concrete
- #3 Rebar on 12" centers
- Beams as needed

Contract

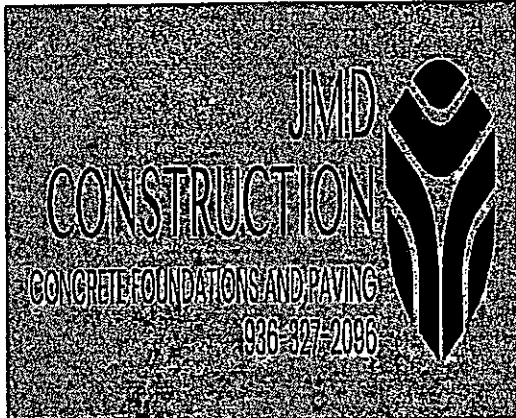

CUSTOMER NAME:	Polk County Maintenance
PHONE #:	
EMAIL:	
JOB NAME & #:	Maintenance-19, #2024018
JOB ADDRESS:	110 Alle Bean, Livingston
DATE:	5/10/2024

Concrete price is based on the following Specifications.

Foundation:	N/A
Thickness:	N/A
PSI:	
Beam Size:	N/A
Beam Location:	N/A
Beam Steel:	N/A
Mat Steel:	N/A
QTY of Piers	0
Pier Size:	N/A
Pier Steel:	N/A
Slab Finish:	N/A
Plumbing:	N/A
Paving:	42x65', 5" paving, 3,000 Psi, #3 12" O.C.

SCOPE OF WORK:

- 1 Remove existing rock and pile to side
- 2 Form and pour 42 x 65' paving around fuel island, as described by Jay burks
- 3 Paving to be 5" thick, 3,000 Psi with medium broom finish
- 4 Paving rebar to be #3, 12" centers
- 5 Expansion/control joints placed as needed
- 6 Price to include 8" shovel beam around exterior not meeting existing concrete

EXCLUSIONS: (Materials/Labor)

Permits, Engineering, Inspections, Builders Risk Insurance, Unforeseeable Obstructions, Liquidated Damages
Dumpster and haul off of construction waste
Pump Truck (If pump truck is needed it will be at an additional \$2,000 charge to the customer.)
Dirt Work, Site Work, Final Grading (Unless Otherwise Noted)
Landscaping
Damage to unmarked utilities and sprinklers

This contract is valid for 7 days due to price fluctuations beyond our control.

CONCRETE COST: \$15,000

ADDITION COST: \$0

TOTAL JOB COST: \$15,000


Applicable Sales Tax will be Added at time of CONTRACT

SUBTOTAL: \$15,000.00

SALES TAXES: N/A

TOTAL: \$15,000.00

Printed Name: Jacob Roming

Signature: 

Date: 5-10-2024